




**Technical Data Comparison Chart
March 2020**

PRODUCT	POWER	LIGHT OUTPUT (@ 12")	COLOR TEMP KELVIN)	CRI	BEAM ANGLE	AVERAGE LIFE (@12 V)
GEN V LED	12vdc/1.5w/150ma	398 Lux	4000K	85 Ra	80' x 100' (+/- 40' x 50')	60,000 hours
LED 3	12vdc/1 Watt/150mA	260 Lux (Warm) 280 Lux (Daylight) 330 Lux (Cool)	3000K (Warm) 5000K (Daylight) 6500K (Cool)			60,000 Hours
ANSER	12vdc/1.8 Watt/180mA	796 Lux	3100K	90+ Ra	64' (+/- 32')	60,000 Hours
ANSER SPOT	12vdc/1.8 Watt/180mA	796 Lux	3100K	90+ Ra	20' (+/- 10')	60,000 hours

All test data subject to normal variances. Specifications subject to change without notice.

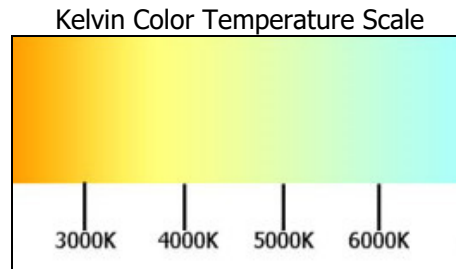

Power Supplies

GXF-10 Power Supply-(US Style)

Plug Type: A
Input: 100-240V 50/60 Hz, 1A
Output: 12V/1A Max: 12W

EXF-10G Power Supply- (Euro Style)

Plug Type: C
Input: 100-240V 50/60 Hz, 1A
Output: 12V/1A Max: 12W

Temperature: Operating 0 deg C to +40 deg C, Storage -20 deg C to +85 deg C Humidity: Operating and storage 5%-95% RH, non-condensing